

51K

Mill Rotary Seals

Split Radial Seals for Bearing and Gearbox Protection

Chesterton® 51K seals are high-performance radial seals for heavy duty, dynamic rotary seal applications. These seals provide long-lasting sealing and superior protection against ingress of solid particles, dust and fluids, protecting bearing houses and gearboxes across the heavy industries, even in the most hostile working environments.





High-performance elastomers create resistance to compression setting, wear, and aging. A broad range of engineered elastomers allow use in high and low temperature conditions and provide excellent fluid compatibility.

The 51K is manufactured by compression molding technology that provides accurate dimensional, geometrical tolerances, and improved fitting. The seal body is equipped with a strong, flexible fabric back for tight fitting within the seal cavity. A helical garter spring maintains the seal lip contact and sealing force on the shaft.

According to industrial standards sizing, the 51K is a direct retrofit, which eliminates the need of equipment modification. The 51K is offered in different designs based on application requirements.




- Long lasting sealing and superior protection against ingress of foreign materials
- High performance elastomers ensure plant-wide usage and long service life
- Unique lip design combined with autolubricated elastomer offer low friction
- Direct retrofit eliminates equipment modification
- Split versions are available for easy assembly

AVAILABLE DESIGNS		
Series		Usage
51K		with standard style in solid and split form
51KW		with additional dust lip
51KHP		with special lip profile to withstand high pressures up to 0,4 MPa (4 bar) – solid only
51KL		with additional circumferential groove for lubrication

Typical Applications

- Gear drives
- Back-up rolls in hot and cold mills
- Work rolls in hot and cold mills
- Pulp and paper industry
- Pumps
- Propeller shafts
- Wind turbine main bearings
- Rotary applications in cement plants

Seal Construction

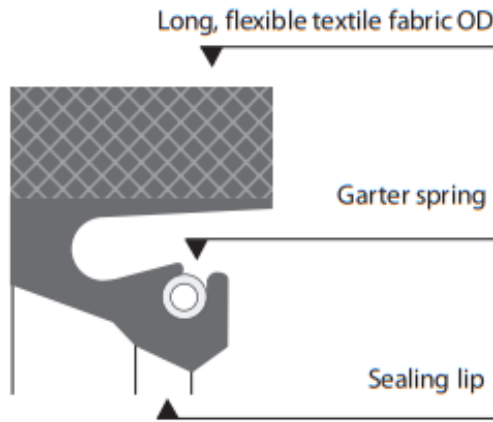

Traditional open garter spring groove design



Improved garter spring groove design from Chesterton for safe installation

INSTALLATION INFORMATION

Parameters	Recommended values
Shaft hardness	40 - 50 HRC
Shaft surface finish	Ra = 0.3 to 0.5 µm (12-20 µin) and Rmax 1 to 2 µm (40 to 80 µin) plunge ground
Shaft tolerance	h11
Housing tolerances	H8
Shaft misalignment	Depending on the surface speed 1.5 mm (0.06 in) should not be exceeded

Mounting

- The Chesterton 51K Series is always used with a retaining plate
- The retaining plate creates an axial preload that adds to the static sealability of the seal
- The plate should be sufficiently dimensioned to avoid distortion when bolting up
- To ease mounting of the seal ring make sure the housing has a lead-in chamfer

SPECIFICATIONS

Elastomers	NBR80+PTFE	HNBR 70	FKM70+PTFE
OD Fabric	Textile +NBR	Textile + HNBR	Textile + FKM
Materials of garter spring	AISI 302-316	AISI 302-316	AISI 302-316
Lubricating greases	-20°C to 100°C (-4°F to 212°F)	-30°C to 150°C (-22°F to 302°F)	-20°C to 200°C (-4°F to 392°F)
Mineral oils	-20°C to 100°C (-4°F to 212°F)	-30°C to 150°C (-22°F to 302°F)	-20°C to 200°C (-4°F to 392°F)
Water	5°C to 100°C (41°F to 212°F)	5°C to 150°C (41°F to 302°F)	5°C to 100°C (41°F to 212°F)
Surface speed m/s (ft/min)	1.5 (2952 ft/min)	2.0 (3937 ft/min)	2.5 (4921 ft/min)
Technical pressure MPa (psi) 51K, 51KW, 51KL Solid	0.05 (7.25)	0.05 (7.25)	0.05 (7.25)
Technical pressure MPa (psi) 51K, 51KW, 51KL Split	No pressure can be applied	No pressure can be applied	No pressure can be applied
Technical pressure MPa (psi) 51HP Solid	0.4 (58)	0.4 (58)	0.4 (58)
Size range mm (inch)** Seal OD	300 to 1200 (12 to 47)	300 to 1200 (12 to 47)	300 to 1200 (12 to 47)

**Please contact your Chesterton representative for other sizes.

Chesterton ISO certificates available on www.chesterton.com/corporate/iso

Technical data reflects results of laboratory tests and is intended to indicate general characteristics only. A.W. Chesterton Company disclaims all warranties express or implied, including warranties of merchantability and fitness for a particular purpose. Liability if any, is limited to product replacement only. Any images contained herein are for general illustrative or aesthetic purposes only and are not intended to convey any instructional, safety handling or usage information or advice respecting any product or equipment. Please refer to relevant Safety Data Sheets, Product Data Sheets, and/or Product Labels for safe use, storage, handling, and disposal of products, or consult with your local Chesterton sales representative.

© 2017 A.W. Chesterton Company.
 ®Registered trademark owned by A.W. Chesterton Company in USA and other countries, unless otherwise noted.

Distributed by:



Sede legale: Via Panoramica 191 - 23010 Berbenno di Valtellina (SO)
 Sede operativa: Via Europa angolo G. Marconi sn - 23010 Berbenno di Valtellina (SO)
 C.F. / P. IVA: 00877330142
 Tel. 0342 49 27 14
 Mail: info@mkr.it - Pec: mkr@pec.legal.it